

TECHNICAL DATASHEET

EEx Absolute Encoders AX 70 / 71 - SSI-P



Version AX 70 - Aluminium




Version AX 71 - Stainless Steel

- ATEX certification for gas and dust explosion proof
- Same electrical performance as ACURO industry
- Protection class up to IP67
- Diameter only 70 mm
- Robust design
- Also available with stainless steel housing (AX 71 - SSI-P)
- Resolution up to 29 Bit (17 Bit ST, 12 Bit MT)
- Applications: enamelling production line, petro chemistry, bottling machines, mixers, silo works, mills



EX-CLASSIFICATION

The absolute shaft encoder line ACURO is available in explosion proof design with explosion proof enclosure "d" under AX 70 and AX 71 (stainless steel). The PTB has assured with the Declaration of Conformity that the AX 70 / 71 meets the requirements of safety and health according to EN 50014 and EN 50018. Therefore it is approved in explosive areas, code "Ex II 2 G/D E Ex d II C T4/T6 IP65/ IP66 135°C resp. 85°C". For applications under tough environmental conditions and food industry the stainless steel version AX 71 is available.

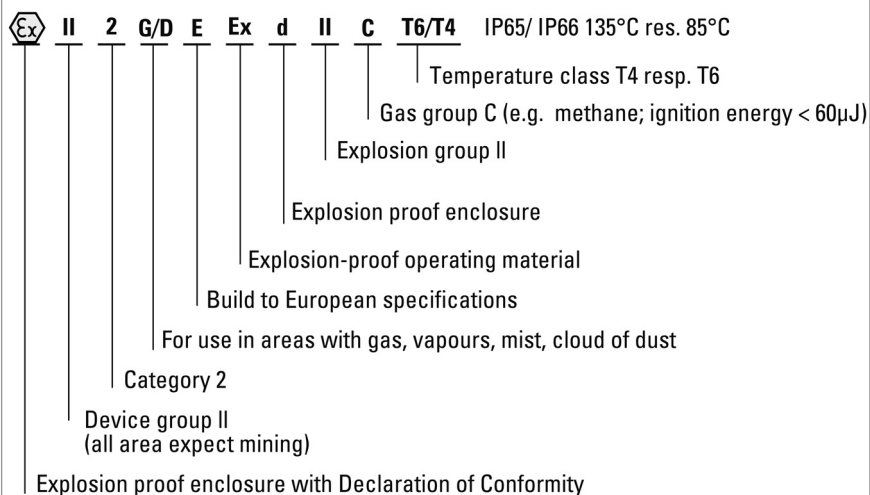

T6 = Highest permissible surface temperature +85°C (max. speed = 6000 U/min⁻¹)
 T4 = Highest permissible surface temperature +130°C (max. speed = 10000 U/min⁻¹)

TECHNICAL DATA mechanical

Housing diameter 70 mm

TECHNICAL DATASHEET

EEx Absolute Encoders AX 70 / 71 - SSI-P

TECHNICAL DATA mechanical (continued)

Shaft diameter	10 mm (Solid shaft)
Flange (Mounting of housing)	Clamping flange
Protection class shaft input (EN 60529) ¹	T4: IP64 or IP67 T6: IP64
Protection class housing (EN 60529)	T4: IP65 or IP67 T6: IP65
Shaft load axial / radial	40 N / 100 N
Max. speed	T4: max. 10 000 rpm T6: max. 6000 rpm
Torque	≤ 1 Ncm
Moment of inertia	approx. 20 gcm ²
Vibration resistance (DIN EN 60068-2-6)	100 m/s ² (10 ... 500 Hz)
Shock resistance (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Ambient temperature	T4: -40 °C ... +60 °C T6: -40 °C ... +40 °C
Storage temperature	-25 °C ... +85 °C
Material shaft	Stainless Steel
Material housing	AX 70: Aluminum AX 71: Stainless Steel
Weight	AX 70: approx. 1.4 kg AX 71: approx. 4.8 kg
Connection	Cable, axial

¹ No dust explosion-proof (D) for IP64

TECHNICAL DATA electrical

Supply voltage	DC 10-30 V
Max. current w/o load	250 mA (ST / MT)
Resolution singleturn	10 - 17 Bit
Resolution multiturn	12 Bit
Output code	Binary, Gray
Drives	Clock and Data / RS422
Parametrization	Resolution, Code type, Direction, Output format, Warning, Alarm, Preset values
Control inputs	Direction, Preset 1, Preset 2
Alarm output	Alarm bit

¹ Programmable with WIN SSI

RECOMMENDED DATA TRANSFER RATE bei SSI

The max. data transfer rate depends on the cable length. For Clock / $\overline{\text{Clock}}$ and Data / $\overline{\text{Data}}$ please use twisted pairs. Use shielded cable.

Cable length	Frequency
< 50 m	< 400 kHz
< 100 m	< 300 kHz
< 200 m	< 200 kHz
< 400 m	< 100 kHz


TECHNICAL DATASHEET

EEx Absolute Encoders AX 70 / 71 - SSI-P

ELECTRICAL CONNECTIONS Cable

Color	No.	SSI programmable
white 0.14 mm	6	RS232 Rx/D
brown 0.14 mm	5	RS232 Tx/D
green	10	$\overline{\text{Clock}}$
yellow	9	Clock
grey	8	$\overline{\text{Data}}$
pink	7	Data
blue	3	Direction
black	4	0 V signal output
red	1	Preset 1
violet	2	Preset 2
brown 0.5 mm	11	0 V supply voltage
white 0.5 mm	12	DC 10 ... 30 V
Screen		Screen connected to encoder housing

DIMENSIONED DRAWINGS

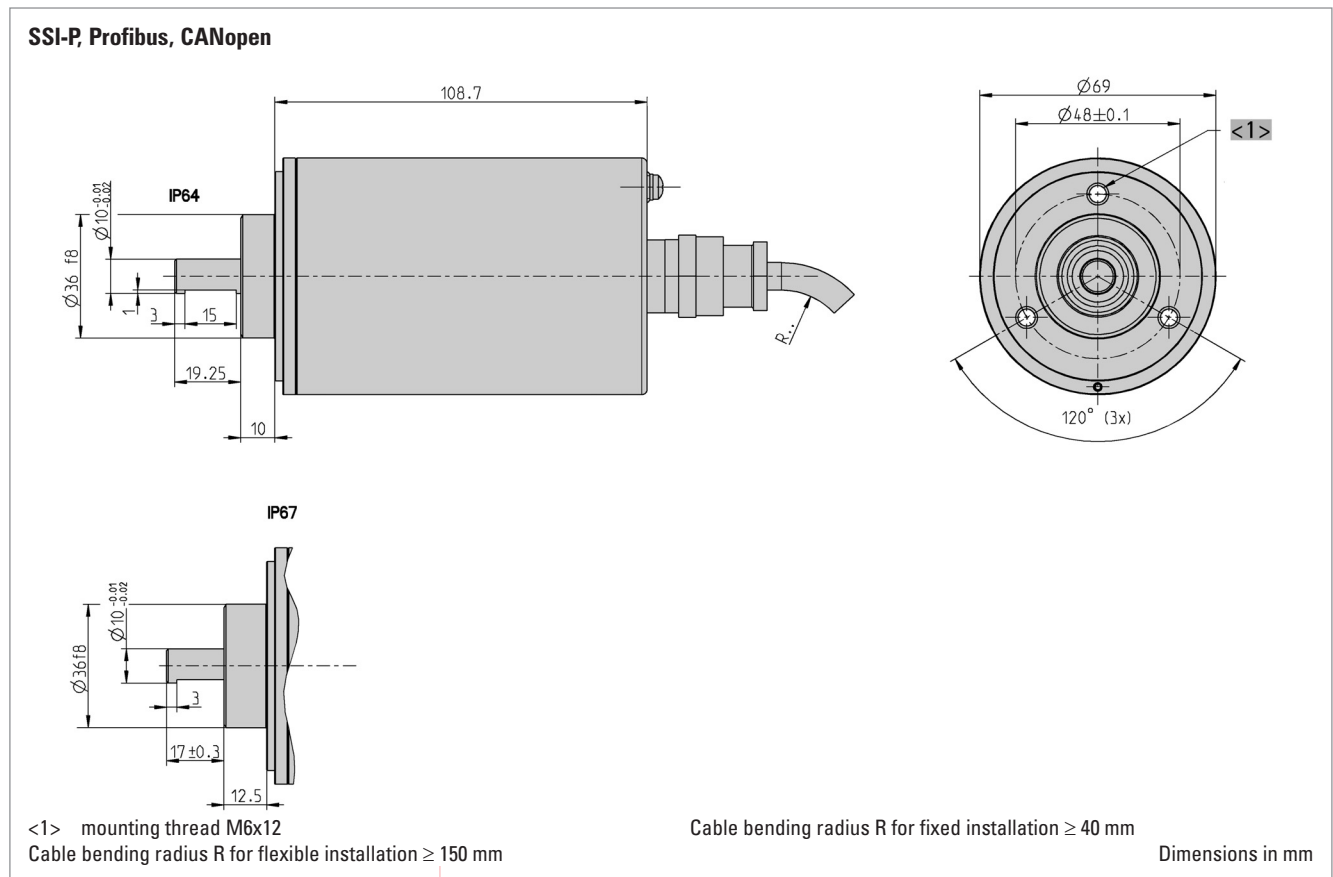

TECHNICAL DATASHEET

EEx Absolute Encoders AX 70 / 71 - SSI-P

ORDERING INFORMATION

Type	Resolution	Supply voltage	Flange, Protection, Shaft ^{1,2}	Interface	Connection
<input type="checkbox"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
AX70 AX71	0010 10 Bit ST 0012 12 Bit ST 0013 13 Bit ST 0014 14 Bit ST 0017 17 Bit ST 1212 12 Bit MT + 12 Bit ST 1213 12 Bit MT + 13 Bit ST 1214 12 Bit MT + 14 Bit ST 1217 12 Bit MT + 17 Bit ST higher resolution on request	E DC 10 - 30 V	K.42 Clamping, IP64, 10 mm K.72 Clamping, IP67, 10 mm	SP SSI program- mable	A Cable, axial

¹ Dust explosion-proof certification (D) only for IP67

² IP67 only with temperature class T4

ORDERING INFORMATION

Selection of cable length

Versions with cable outlet (connection A, B, E or F) are available with various lengths of cable. To order your desired cable length, please add the respective code to the end of your ordering code. Further cable lengths on request.

Code	Cable length
-F0 / without code	5 m
-K0	10 m
-P0	15 m
-U0	20 m
-V0	25 m

TECHNICAL DATASHEET

EEx Absolute Encoders AX 70 / 71 - SSI-P Accessories

FLEXIBLE COUPLINGS



Bellows coupling




Helical coupling




Isolated disk coupling

		Ordering code
Bellows coupling	10 mm / 10 mm	3 520 037
Bellows coupling	8 mm / 10 mm	3 520 077
Helical coupling 25/32	6 mm / 10 mm	3 520 066
Helical coupling 25/32	10 mm / 12 mm	3 520 065
Helical coupling 25/32	10 mm / 10 mm	3 520 074
Isolated disk coupling	6 mm / 10 mm	3 520 082
Isolated disk coupling	10 mm / 10 mm	3 520 088


MEASURING WHEELS



Tread 2 + 3



Tread 4



Tread 6

Tread 2 B

with glued-on rubber profile B = low-wear rubber surface with good grip (white)
Applications such as paper and cardboard, measuring cables, nongreasy metals, fleece, undressed or surface-treated wood, soft and hard plastics

Tread 3

vulcanized rubber surface with parallel knurl
Applications such as rubber, leather, fabrics, flooring and glass

Tread 4

Aluminum with parallel knurl
Applications such as rubber, soft plastics, wood with rough surface, and to a limited extent for fabrics

Tread 6

plastic surface
Applications such as wire, greasy metals and steel sections

Material	Bore diameter (mm) fitting to encoder shaft	Circumference	Tread	Width of bearing surface	Ordering code
Aluminum	10 mm	0.2 m	2 B	12 mm	0 601 049
Aluminum	10 mm	0.5 m	2 B	25 mm	0 601 151
Aluminum	10 mm	0.5 m	3	25 mm	0 601 156
Aluminum	12 mm	0.5 m	3	25 mm	0 601 159
Aluminum	10 mm	0.5 m	6	25 mm	0 601 163
Aluminum	10 mm	0.5 yd	4	25 mm	0 601 157

TECHNICAL DATASHEET**EEx Absolute Encoders AX 70 / 71 - SSI-P
Accessories**

TECHNICAL MANUALS

	Ordering code
Technical manual, English, SSI-P	2 565 289 (or homepage)
Technical manual, German, SSI-P	2 565 287 (or homepage)